

SE300 SERIES SMART SWITCHES FOR TRAFFIC CONTROL

Basic Management Capabilities at a Fraction of the Cost

Remote Monitoring and Diagnostics

Installing fully managed switches all throughout a traffic management system can be prohibitively expensive. One of our customers realized that their application didn't actually require all of those management capabilities. Instead, they installed Advantech B+B SmartWorx SE305-T smart switches, which support Modbus/TCP to communicate with SCADA software and SNMP to communicate with NMS (Networking Management System). Although they're not much more expensive than an unmanaged switch, SE300 series smart switches provide basic management capabilities. They give control engineers full read control for every port on the switch, allowing for remote troubleshooting and diagnostics. If a problem arises, your field technicians won't have to go hunting for the cause. You'll know exactly where the problem lies before the truck even starts to roll.

Essential Management Features

SE300 switches provide SNMP and Modbus/TCP management capabilities.

Intelligent Inside

- IEEE 802.1p QoS (Zero Touch)
- Jumbo frame support -- 9,216 bytes
- Free Management Tool - IView²
- Loop Detection
- Full Gigabit with PoE/PoE+ options
- Fully Compatible with the Most Popular SCADA/HMI Software
- IP address assignment, allowing for a static IP address or an address that is discoverable via DHCP

HMI/SCADA Software Integration


- System Information
- Device Status/IP Address
- Port Information
- Port Status/Port Speed
- Packet Information
- Tx/Rx Error Packets

Dual Power Inputs - 8.4 to 52.8 VDC

- Overload current protection
- Power-fail Relay

Designed and Built for Hazardous Environments

- Wide Temp design, -40 to 75C
- MTBF: Over 590 years
- Radiated/Conducted noise protection, EMC Level 3

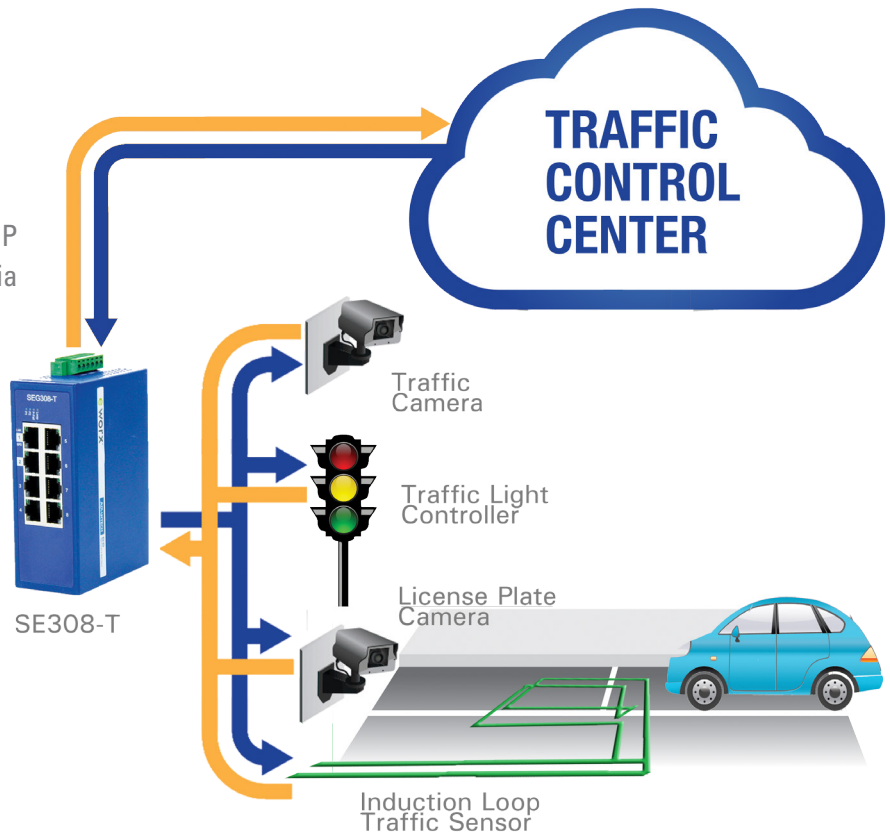



Ethernet Green®, IEEE802.3az Energy-Efficient Ethernet

- eWorx Switches cut power usage by up to 60%, reducing total cost of ownership
- Automatically powers down ports that have no link
- Budgets power output for different Ethernet cable lengths




IT/OT CONVERGENCE

Wide Variety of Port Configurations

- 5 Ports, up to 18 Ports
- 10/100Mbps & Gigabit models
- Fiber module options (M.M, S.M)
- Fiber connector options (SC,LC,ST)

Industrial Certifications Tailored to Meet the Needs of Your Application

- IECEx
- UL508
- Class I, Division 2 Group A,B,C, D
- ATEX Zone 2

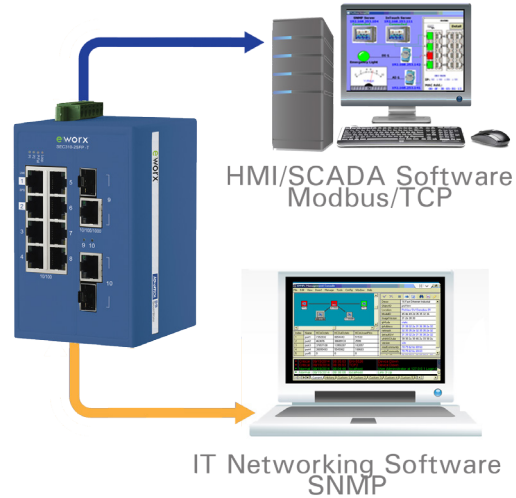

Models with PoE/PoE+ Option

- IEEE802.3af/at compliant
- Each port, up to 30 W
- PoE power budget, Max. 60 W
- Smart PoE management



USA Headquarters
707 Dayton Road
Ottawa, IL 61350 USA
Phone: 1-815-433-5100
Fax: 1-815-433-5109
orders@advantech-bb.com

EMEA International Sales
Oranmore, CO. Galway, Ireland
Phone: +353 91 79244
Fax: +353 91 792445
Online ordering:
esales@advantech-bb.com

Cellular Product Group
Sokolská 71
562 04 Ústí nad Orlicí, Czech Republic
Phone: +420 465 521 020
Fax: +420 464 647 299
sales@advantech-bb.com

Custom & OEM Product Design
Phone: 1-815-433-5222
Fax: 1-815-433-5104
Attn: Custom Dept.
custom@advantech-bb.com
Custom Quote Request Form
advantech-bb.com/custom.asp